



DUO^{G2}

Lighting Control and Automation

Need a dimmer + switch? Use the perfect DUO G2.

Stylish dimming switch for complete ambience control. DUO G2 LED Dimmer Switch has been designed specifically to dim Haneco's dimmable luminaires so you can be sure it will work as required.



DIM
Phase Cut
Dimming



CONTROL
Multiple
Control
Methods



3yr
Warranty

Features

- Suitable for compatible Haneco LED fittings
- Load correction capacitor included for loads < 10W
- Simple 2-wire design for easy installation
- Integrated switch and dimmer knob
- Compatible with standard wall plates & apertures
- Dim to off over 30mins
- Dim to max over 30mins

NO. OF CLICKS	RESULT
1	On/Off Enable
3	Dim Down Over 30 Mins
4	Dim Up Over 30 Mins
Long Press 4s	Enter Setup Mode
2	Enable/Disable Backlight
3	Enable/Disable Switch
4	Set Minimum Brightness/Cancel
5	Set Maximum Brightness/Cancel
6	Maximum Compatibility
7	Optimised Dimming
9	Reset to Factory Settings

Product Overview

MAX LOAD WATTAGE	DIMMING METHOD	SAP CODE	PRODUCT CODE
350W	Phase-Cut Dimming	2002378	DUO350WG2

SPECIFICATIONS

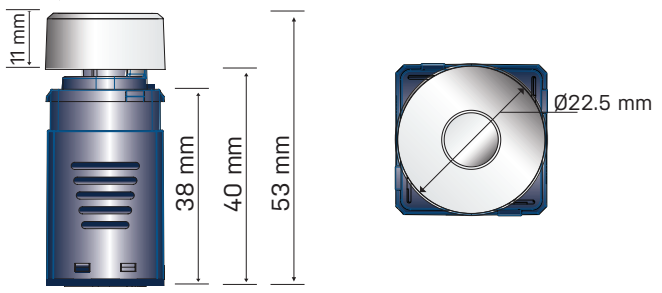
Dimming Method:	Phase-Cut Dimming (TE)	Overcurrent Protection:	Yes	Housing:	Acrylic
Supply Voltage:	220-240 V, 50 / 60 Hz	Overvoltage Protection:	Yes	Connection Insulation:	PVC
Max. Load Wattage:	350 W	Overtemperature Protection:	Yes	Warranty:	3 yrs
Dimming Range :	2 % to 100 %	Noise Immunity:	Yes		
Operating Ambient Temp. :	0 to 50 °C	Retain Dimmer Setting:	Yes		
Thermal Derating:	25 to 50 °C	Mechanical Stop: (set min/max brightness)	Yes		
Weight:	25 g	Connection Type:	110mm Flying Leads		

QUICK FACTS




- Trailing edge dimmer suitable for compatible Haneco fittings
- Maximum load 350W (e.g. over twenty LED downlights)
- Compatible with standard wall plates and apertures
- Easy adjustment of minimum or maximum dimming
- Integrated switch and dimmer knob
- On/off switch can be disabled
- Easy to locate in the dark with subtle blue backlighting
- Simple 2 wire design for easy installation
- Smooth dimming to off over 30 mins
- Smooth dimming to maximum brightness over 30 mins

Lighting Control and Automation

DIMENSIONS (mm)



ACCESSORIES

<p>DUOG2-KNOB-WH</p> <p>White Dimmer Knob For DUO G2 LED Dimming Switch</p> 	<p>DUOG2-KNOB-BK</p> <p>Black Dimmer Knob For DUO G2 LED Dimming Switch</p> 	<p>LCC25UF</p> <p>Load Correction Capacitor 0.33uF/305Vac Capacitance Value</p> 
--	--	--

