


LINEAR AND TRACK





FLEXION ^{SMOOTHLINE}	156
FLEXION ^{RGB}	160
FLEXION ^{G2 KIT}	162
FLEXION ^{G2}	164
PARALLAX	166
FOCI ^{G2}	168
3-CIRCUIT TRACK	170
ACCESSORIES	172

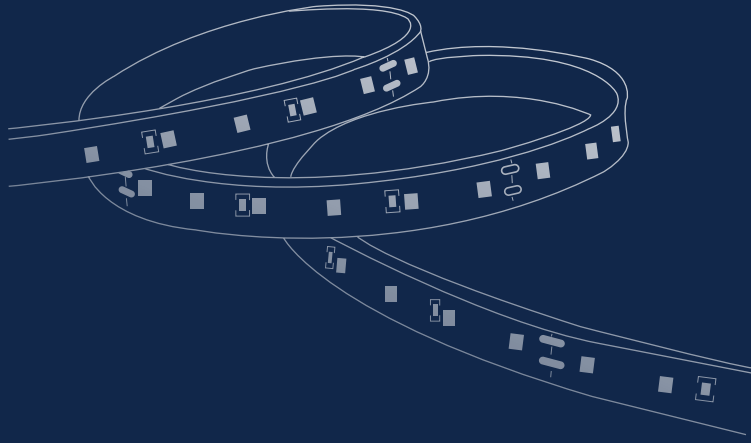



Installer: Midnight Electrics, VIC



Office Upgrade by SQ Electrical QLD

FLEXION



High efficacy rating to promote energy saving

Exceptional performance

Provide linear lighting for bespoke applications

Continuous and seamless lighting

True colour definition to highlight natural colour

High Colour Rendering Index (CRI)

Covers a diverse range of applications

Extensive model range

Ideal for accent lighting

Excellent feature lighting option

FLEXION^{SMOOTHLINE}

Seamless lighting solution.

For ambient or feature lighting, the new FLEXION SMOOTHLINE range offers integrated lighting solutions that produce bright, effective linear illumination. Endless flexibility is provided when combining the FLEXION SMOOTHLINE series with the new PARALLAX series of complementary aluminium profiles.



RAPID

Fast Installation



>90

CRI Colour Rendering Index



IP40

Ingress Protection Rating



CLASS II

Double Insulated



54,000hr

Projected Lifespan



5yr

Warranty

PRODUCT RANGE

2 METRE KITS

Product Code	FXDL6W-3K2M	FXDL6W-4K2M	FXDL6W-6K2M	FXDL9W-3K2M	FXDL9W-4K2M
SAP Code	2002462	2002463	2002464	2002471	2002472
Power	6 W/m	6 W/m	6 W/m	9 W/m	9 W/m
Lumen Output	760 lm/m	760 lm/m	760 lm/m	1020 lm/m	1020 lm/m
Efficacy	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W
CCT	3000 K	4000 K	6000 K	3000 K	4000 K
Cut Length	55 mm	55 mm	55 mm	55 mm	55 mm
IP Rating	IP40	IP40	IP40	IP40	IP40
Weight	0.35 kg	0.35 kg	0.35 kg	0.35 kg	0.35 kg

Product Code	FXDL9W-6K2M	FXDL14W-3K2M	FXDL14W-4K2M	FXDL14W-6K2M
SAP Code	2002473	2002480	2002481	2002482
Power	9 W/m	14 W/m	14 W/m	14 W/m
Lumen Output	1020 lm/m	1470 lm/m	1470 lm/m	1470 lm/m
Efficacy	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W
CCT	6000 K	3000 K	4000 K	6000 K
Cut Length	55 mm	55 mm	55 mm	55 mm
IP Rating	IP40	IP40	IP40	IP40
Weight	0.35 kg	0.35 kg	0.35 kg	0.35 kg

5 METRE KITS

Product Code	FXDL6W-3K5M	FXDL6W-4K5M	FXDL6W-6K5M	FXDL9W-3K5M	FXDL9W-4K5M
SAP Code	2002465	2002466	2002467	2002474	2002475
Power	6 W/m	6 W/m	6 W/m	9 W/m	9 W/m
Lumen Output	760 lm/m	760 lm/m	760 lm/m	1020 lm/m	1020 lm/m
Efficacy	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W
CCT	3000 K	4000 K	6000 K	3000 K	4000 K
Cut Length	55 mm	55 mm	55 mm	55 mm	55 mm
IP Rating	IP40	IP40	IP40	IP40	IP40
Weight	0.52 kg	0.52 kg	0.52 kg	0.52 kg	0.52 kg

Product Code	FXDL9W-6K5M	FXDL14W-3K5M	FXDL14W-4K5M	FXDL14W-6K5M
SAP Code	2002476	2002483	2002484	2002485
Power	9 W/m	14 W/m	14 W/m	14 W/m
Lumen Output	1020 lm/m	1470 lm/m	1470 lm/m	1470 lm/m
Efficacy	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W
CCT	6000 K	3000 K	4000 K	6000 K
Cut Length	55 mm	55 mm	55 mm	55 mm
IP Rating	IP40	IP40	IP40	IP40
Weight	0.52 kg	0.52 kg	0.52 kg	0.52 kg

10 METRE KITS

Product Code	FXDL6W-3K10M	FXDL6W-4K10M	FXDL6W-6K10M	FXDL9W-3K10M	FXDL9W-4K10M
SAP Code	2002468	2002469	2002470	2002477	2002478
Power	6 W/m	6 W/m	6 W/m	9 W/m	9 W/m
Lumen Output	760 lm/m	760 lm/m	760 lm/m	1020 lm/m	1020 lm/m
Efficacy	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W	Up to 110 lm/W
CCT	3000 K	4000 K	6000 K	3000 K	4000 K
Cut Length	55 mm	55 mm	55 mm	55 mm	55 mm
IP Rating	IP40	IP40	IP40	IP40	IP40
Weight	0.85 kg	0.85 kg	0.85 kg	0.85 kg	0.85 kg

Product Code	FXDL9W-6K10M
SAP Code	2002479
Power	9 W/m
Lumen Output	1020 lm/m
Efficacy	Up to 110 lm/W
CCT	6000 K
Cut Length	55 mm
IP Rating	IP40
Weight	0.85 kg

Find out more



COMMON SPECIFICATIONS

LED Technology	SOB	Input Voltage	24 vDC
Product Colour	White	Electrical Classification	Class II
Mounting Type	Self Adhesive Backing	Projected Lifespan	54,000hrs @ Ta 25° (L70)
CRI	> 90	Operating Ambient Temperature	0 to 40°C
Beam Angle	140°	Surge Protection	Overload / Short Circuit
SDCM	< 3	Smart	KASTA Compatible
Warranty	5 yrs	Dimming	Non-Dimmable
Electrical Classification	Class II		
Connection Type	450mm flying tail with 1.2m flex and plug		

APPLICATIONS

Accent / Display / Feature Lighting
Hallways
Boardroom / Meeting Rooms
Hotel Rooms
Butler Pantry
Restaurants / Cafes
Cabinetry
Retail Spaces
Cocktail Lounge
Showrooms
Ensuite
Staircase
Games Rooms
Walk-in Wardrobes
Kitchen / Food Prep
Function Areas

ACCESSORIES

Couplers and Connectors



5pcs Strip Joined By Long Cable For White
FXDL-LNGCABJNR
(SAP 2002494)



5pcs Strip Joiner-Straight For White Only
FXDL-JNR
(SAP 2002488)



5pcs Strip Joiner-Corner For White Only
FXDL-CNR
(SAP 2002489)



5pcs Strip Clip For White Only
FXDL-CLIP
(SAP 2002496)




5pcs Strip Cable Connector With Tail For White Only
FXDL-CABCNCTR
(SAP 2002466)



30m Strip Cable
FLEXCBL30M
(SAP 2001039)

DIMENSIONS

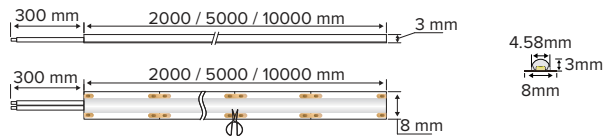

FXDL6W-3K2M / FXDL6W-4K2M / FXDL6W-6K2M / FXDL9W-3K2M / FXDL9W-4K2M / FXDL9W-6K2M / FXDL14W-3K2M / FXDL14W-4K2M / FXDL14W-6K2M / FXDL6W-3K5M / FXDL6W-4K5M / FXDL6W-6K5M / FXDL9W-3K5M / FXDL9W-4K5M / FXDL9W-6K5M / FXDL14W-3K5M / FXDL14W-4K5M / FXDL14W-6K5M / FXDL6W-3K10M / FXDL6W-4K10M / FXDL6W-6K10M / FXDL9W-3K10M / FXDL9W-4K10M / FXDL9W-6K10M



Kit includes:
FLEXION Smoothline strip
1x Driver with flex & plug


Note: Refer to page 175 for alternative driver options.





FLEXION

RGB

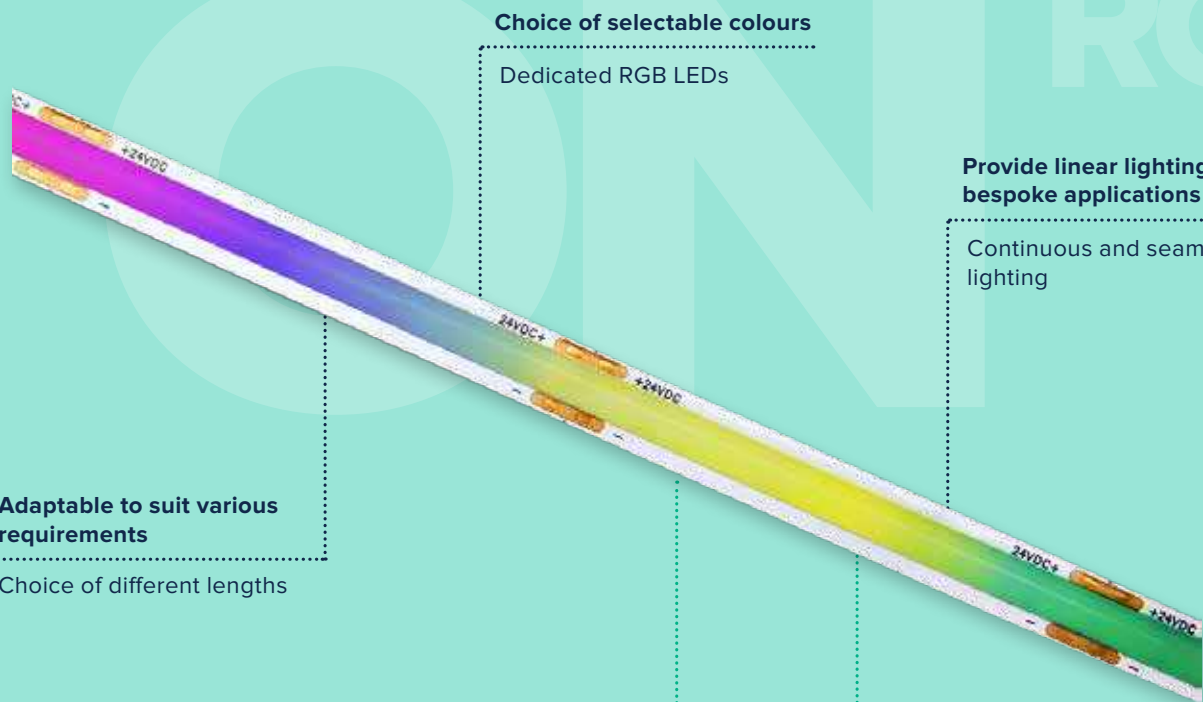

Choice of selectable colours

Dedicated RGB LEDs

Provide linear lighting for bespoke applications

Continuous and seamless lighting

Adaptable to suit various requirements

Choice of different lengths

Complete ready to go kit, no additional parts

5m Kit complete with driver

Ideal for accent lighting







Excellent feature lighting option

FLEXION^{RGB}

Illuminate, transform, inspire.

For vibrant ambient or feature lighting, the FLEXION RGB LED strips deliver stunning, dynamic colour transitions and bright, even illumination. Its versatile design offers endless flexibility, especially when paired with the Parallax profile range, allowing for seamless integration into any lighting setup. Perfect for creating captivating visual effects in both residential and commercial spaces.

The rendering image above is for reference only and does not represent the actual colour output on the luminaire.

 RAPID Fast Installation	 REMOTE Controller	 IP40 Ingress Protection Rating
 CLASS II Double Insulated	 54,000hr Projected Lifespan	 5yr Warranty

PRODUCT RANGE

5 METRE KITS

Product Code	FXCRGB5M	FXCRGBTW5M
SAP Code	2002486	2002487
Power	6 W/m	6 W/m
Lumen Output	210 lm/m	186 lm/m
Efficacy	45 lm/W	40 lm/W
CCT	RGB only	RGB + 6000 K
Cut Length	25 mm	50 mm
IP Rating	IP40	IP40
Weight	0.45 kg	0.45 kg

COMMON SPECIFICATIONS

Product Colour	White	Input Voltage	24 vDC
Mounting Type	Self Adhesive Backing	Electrical Classification	Class II
Beam Angle	140°	Projected Lifespan	54,000hrs @Ta 25° (L70)
SDCM	< 3	Operating Ambient Temperature	0 to 40°C
Remote Controller	Included	Surge Protection	Overload / Short Circuit
Warranty	5 yrs	Smart	KASTA Compatible
Dimming	Non-Dimmable		
Connection Type	450mm flying tail with 1.2m flex and plug		

Music and Scene Mode: Music mode syncs lights with your music, while scene mode offers pre-set colours and effects, perfect for any ambience.

APPLICATIONS

Accent / Display / Feature Lighting
 Boardroom / Meeting Rooms
 Butler Pantry
 Cabinetry
 Cocktail Lounge
 Ensuite
 Games Rooms
 Hallways
 Hotel Rooms
 Restaurants / Cafes
 Retail Spaces
 Showrooms
 Staircase
 Walk-in Wardrobes
 Kitchen / Food Prep
 Function Areas

ACCESSORIES

Couplers and Connectors



5pcs Joiner-Straight
For RGBTW Only
FXCW-JNR
(SAP 2002498)



5pcs Strip Joiner-Straight
For RGB Only
FXC-JNR
(SAP 2002497)



5pcs Strip Cable
Connector With Tail
For RGB
FXC-CABCNCTR
(SAP 2002499)





5pcs Strip Cable
Connector With Tail
For RGBTW
FXCW-CABCNCTR
(SAP 2002500)



Kit includes:
 5M FLEXION RGB / RGBW strip
 1x Driver with flex & plug
 1 x Remote
 1 x Plug in Controller

DIMENSIONS

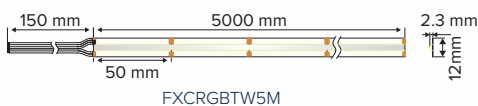

Find out more



Note: Refer to page 175 for alternative driver options.

FLEXION

Increased flexibility

Further reduced trimmable length

True colour definition to highlight natural colour

High Colour Rendering Index (CRI)



All parts within one code

5m LED kit, complete with driver

Almost unlimited design freedom

Extremely flexible LED strip, IP65

Ensured safety

24V extra low voltage

FLEXION^{G2} KIT

Create curious environments.

The FLEXION G2 KIT of LED strips offers unlimited flexibility and installation freedom, all in one complete set. IP65 options make it is the right tool for enhancing your applications appearance, indoors or outdoors.



PRODUCT RANGE

5 METRE KITS

Product Code	FX25W5M3K-IP65	FX25W5M4K-IP65	FX25W5M6K-IP65	FX40W5M3K-IP65	FX40W5M4K-IP65
SAP Code	2002018	2002016	2002014	2002024	2002022
Power	25W (5W/m)	25W (5W/m)	25W (5W/m)	40W (8W/m)	40W (8W/m)
Lumen Output	505 lm/m	514 lm/m	494 lm/m	626 lm/m	585 lm/m
Efficacy	105 lm/W	105 lm/W	105 lm/W	100 lm/W	100 lm/W
CCT	3000 K	4000 K	6500 K	3000 K	4000 K
Cut Length	100 mm	100 mm	100 mm	100 mm	100 mm
IP Rating	IP65	IP65	IP65	IP65	IP65
Weight	0.30 kg	0.30 kg	0.30 kg	0.30 kg	0.30 kg

Product Code	FX40W5M6K-IP65	FX75W5M3K-IP65	FX75W5M4K-IP65	FX75W5M6K-IP65
SAP Code	2002020	2002030	2002028	2002026
Power	40W (8W/m)	75W (15W/m)	75W (15W/m)	75W (15W/m)
Lumen Output	521 lm/m	1135 lm/m	1158 lm/m	996 lm/m
Efficacy	100 lm/W	90 lm/W	90 lm/W	90 lm/W
CCT	6500 K	3000 K	4000 K	6500 K
Cut Length	100 mm	100 mm	100 mm	100 mm
IP Rating	IP65	IP65	IP65	IP65
Weight	0.30 kg	0.30 kg	0.30 kg	0.30 kg

COMMON SPECIFICATIONS

Product Colour	White	Projected Lifespan	> 50,000hrs @Ta25° (L70)
Mounting Type	Self Adhesive Backing	Operating Ambient Temperature	-20 to 40°C
Beam Angle	120°	Surge Protection	Overload / Short Circuit
SDCM	<5	Smart	KASTA Compatible
Warranty	5 yrs	Dimming	Non-Dimmable
Connection Type	1m Flying Tail with 1.2m Flex & Plug		
Input Voltage	220-240V, 50/60Hz		
Electrical Classification	Class II		

APPLICATIONS

Hospitality
Residential
Commercial




Kit includes:
5m FLEXION strip
1x Driver with flex & plug

ACCESSORIES

Couplers and Connectors

					
Joiner FLEXJNR-V2 (SAP 2002225)	Right Angle Joiner FLEXCNR-V2 (SAP 2002226)	Saddle FLEXSDL-V2 (SAP 2002224)	Low Profile Diffuser FLEXCOVER-V2 (SAP 2002223)	Strip to Power Connector FLEXS-P10MM-SLIM (SAP 2001553)	5pcs 145mm Strip to Power Connector FLEX-S-P-V2 (SAP 2002227)
					
150mm Connector FLEX-S-S-V2 (SAP 2002229)	30m Strip Cable FLEXCBL30M (SAP 2001039)	IP65 Sealer FLEXSEALER (SAP 2001372)			

DIMENSIONS



Note: Refer to page 175 for alternative driver options.

Find out more



FLEXION

Increased flexibility and design freedom

Further reduced trimmable length

Excellent for colour-critical applications

High CRI > 90



Convenience for larger installations

Available in 50m rolls

Almost unlimited design freedom

Extremely flexible

Ensured safety

24V extra low voltage

FLEXION^{G2}

For large scale designs.

FLEXION G2 is your LED strip solution for those larger installations, where you want to tailor your configuration accordingly.



IP20
Ingress Protection Rating



50,000hr
Projected Lifespan



5yr
Warranty

PRODUCT RANGE

50 METRE KITS

Product Code	FX5W1M3K-50M	FX5W1M4K-50M	FX5W1M6K-50M	FX8W1M3K-50M	FX8W1M4K-50M
SAP Code	2002076	2002075	2002074	2002079	2002078
Power	250W (5W/m)	250W (5W/m)	250W (5W/m)	400W (8W/m)	400W (8W/m)
Lumen Output	531 lm/m	533 lm/m	510 lm/m	668 lm/m	696 lm/m
Efficacy	105 lm/W	105 lm/W	105 lm/W	100 lm/W	100 lm/W
CCT	3000 K	4000 K	6500 K	3000 K	4000 K
Cut Length	100 mm	100 mm	100 mm	50 mm	50 mm
IP Rating	IP20	IP20	IP20	IP20	IP20
Weight	1.15 kg	1.15 kg	1.15 kg	1.15 kg	1.15 kg

Product Code	FX8W1M6K-50M	FX15W1M3K-50M	FX15W1M4K-50M	FX15W1M6K-50M
SAP Code	2002077	2002082	2002081	2002080
Power	400W (8W/m)	750W (15W/m)	750W (15W/m)	750W (15W/m)
Lumen Output	706 lm/m	1299 lm/m	1463 lm/m	1415 lm/W
Efficacy	100 lm/W	90 lm/W	90 lm/W	90 lm/W
CCT	6500 K	3000 K	4000 K	6500 K
Cut Length	50 mm	31.25 mm	31.25 mm	31.25 mm
IP Rating	IP20	IP20	IP20	IP20
Weight	1.15 kg	1.15 kg	1.15 kg	1.15 kg

COMMON SPECIFICATIONS

Product Colour	White	Projected Lifespan	> 50,000hrs @Ta25° (L70)
Mounting Type	Self Adhesive Backing	Operating Ambient Temperature	-20 to 40°C
Beam Angle	120°	Surge Protection	Overload / Short Circuit
SDCM	<3	Smart	KASTA Compatible
Warranty	5 yrs	Dimming	Non-Dimmable
Input Voltage	220-240V, 50/60Hz		
Electrical Classification	Class II		

APPLICATIONS

Hospitality
Residential
Commercial

ACCESSORIES

Couplers and Connectors



Joiner
FLEXJNR-V2
(SAP 2002225)



Right Angle Joiner
FLEXCNR-V2
(SAP 2002226)



Strip to Power Connector
FLEXS-P10MM-SLIM
(SAP 2001553)



5pcs 145mm Strip to Power Connector
FLEX-S-P-V2
(SAP 2002227)




150mm Connector
FLEX-S-S-V2
(SAP 2002229)



30m Strip Cable
FLEXCBL30M
(SAP 2001039)

DIMENSIONS



Note: Driver not included. Refer to page 175 for suitable driver.

Find out more



PARALLAX

Covers a diverse range of applications


Extensive model range

Provides high end appearance

Modernised design

Match perfectly with existing fixtures for a consistent look

Seamless integration

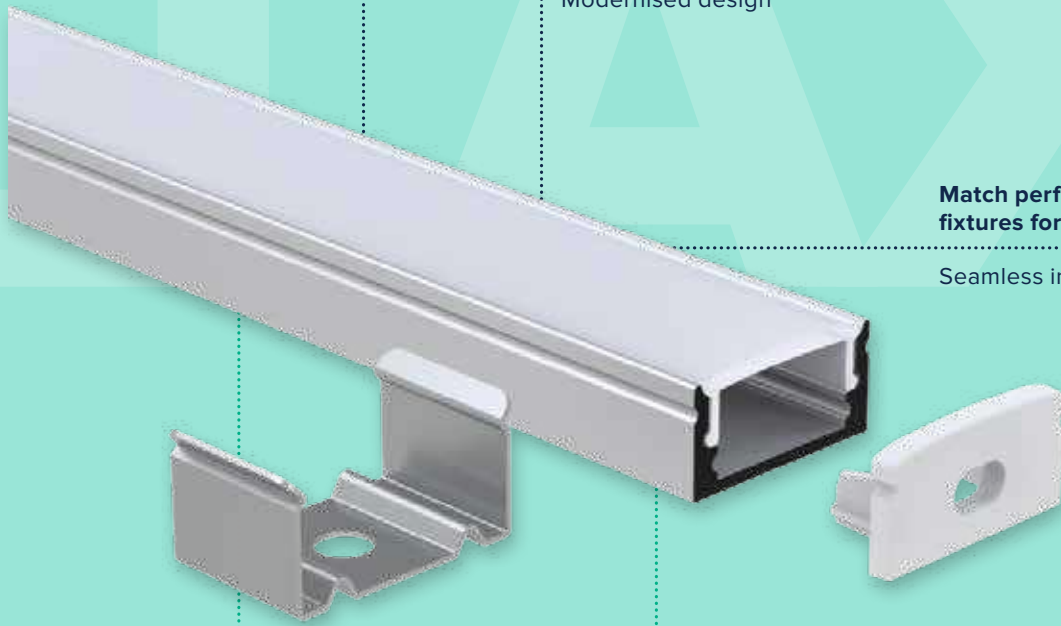

Unobtrusive appearance and increases vandal security

Hidden mounting attributes

Expand the lighting possibilities with different mounting configurations

Versatile mounting options

PARALLAX

Seamless lighting solution.

The PARALLAX aluminium profile range comes in a variety of forms for a wide range of applications, combined with our LED strips. Think FLEXION SMOOTHLINE, think PARALLAX.

Find out more



IP20/65

Ingress Protection Ratings



INSTALL

Easy Installation



RANGE

Extensive Product Range








1yr

Warranty






PRODUCT RANGE








Product Code	PLAXCNR-SMRND	PLAXIP-SM	PLAXIP-CNR	PLAXIP-REC	PLAXPLAS-RECIND
SAP Code	2002507	2002511	2002512	2002513	2002519
IP Rating	IP20	IP65	IP65	IP65	IP20
Length	2m	2m	2m	2m	2m
Beam Angle	120°	115°	120°	110°	220°
Fit	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits
Product Colour	Silver	Silver	Silver	Silver	Silver
Dimensions	2,000 x 16 x 16 mm	2,000 x 18 x 13 mm	2,000 x 16 x 16 mm	2,000 x 18 x 13 mm	2,000 x 100 x 19.6 mm

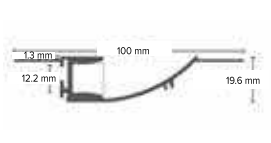

Product Code	PLAXPLAS-RECTMLS	PLAXCOR-SMRND	PLAXCOR-RECRCT	PLAXCOR-RECRND	PLAXSUS-PENDRND
SAP Code	2002516	2002508	2002506	2002509	2002514
IP Rating	IP20	IP20	IP20	IP20	IP20
Length	2m	2m	2m	2m	2m
Beam Angle	110°	90°	115°	90°	165°
Fit	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits
Product Colour	Silver	Silver	Silver	Silver	Silver
Dimensions	2,000 x 53 x 14 mm	2,000 x 17 x 13.4 mm	2,000 x 17 x 8.8 mm	2,000 x 17 x 13.4 mm	2,000 x 20 x 27 mm



Product Code	PLAXSUS-PENDRCT	PLAXCNR-SMFLAT	PLAXPLAS-RECO90	PLAXPLAS-RECI90	PLAXCOR-SMRCT
SAP Code	2002515	2002510	2002517	2002518	2002505
IP Rating	IP20	IP20	IP20	IP20	IP20
Length	2m	2m	2m	2m	2m
Beam Angle	170°	110°	110°	110°	115°
Fit	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE LED Strip Lighting Kits	Compatible with FLEXION SMOOTHLINE & RGB LED Strip Lighting Kits
Product Colour	Silver	Silver	Silver	Silver	Silver
Dimensions	2,000 x 20 x 27 mm	18.5 x 26 x 19 mm	2,000 x 50 x 23 mm	2,000 x 46 x 28 mm	2,000 x 17 x 8.8 mm



Extrusions comes complete with end caps and two mounting clips.

FOCI

G2



Adjust the light to suit the requirements

Power switchable

Improved aesthetics with modern compact design

Sleek and compact

Provides the choice of light hues from a single luminaire

Tritone colour selectable

Customise your lighting experience with a luminaire that effortlessly adjusts its beam spread

Adjustable beam angle

True colour definition to highlight natural colour

High Colour Rendering Index (CRI)

FOCI^{G2}

Timeless elegance and dynamic.

Experience the versatility and precision of FOCI G2, the LED track light that adapts to your lighting needs. With an adjustable beam angle ranging from 24° to 60°, FOCI G2 delivers focused illumination for tasks or a wider beam for ambient lighting. Its sleek, diecast aluminium construction and ultra-slim driver create a modern, architectural statement.



PRODUCT RANGE



Product Code	FOCI24W-W	FOCI24W-B	FOCI35W-W	FOCI35W-B
SAP Code	2002539	2002538	2002541	2002540
Power	12 / 15 / 20 / 24 W	12 / 15 / 20 / 24 W	24 / 28 / 31 / 35 W	24 / 28 / 31 / 35 W
Lumen Output	12 W: 1241 / 1325 / 1370 lm 15 W: 1573 / 1707 / 1733 lm 20 W: 1874 / 2052 / 2080 lm 24 W: 2166 / 2394 / 2373 lm	12 W: 1241 / 1325 / 1370 lm 15 W: 1573 / 1707 / 1733 lm 20 W: 1874 / 2052 / 2080 lm 24 W: 2166 / 2394 / 2373 lm	24 W: 2473 / 2677 / 2649 lm 28 W: 2728 / 3031 / 2989 lm 31 W: 3004 / 3356 / 3244 lm 35 W: 3219 / 3659 / 3502 lm	24 W: 2473 / 2677 / 2649 lm 28 W: 2728 / 3031 / 2989 lm 31 W: 3004 / 3356 / 3244 lm 35 W: 3219 / 3659 / 3502 lm
Efficacy	12 W: 103 / 110 / 114 lm/W 15 W: 105 / 114 / 116 lm/W 20 W: 94 / 103 / 104 lm/W 24 W: 90 / 100 / 99 lm/W	12 W: 103 / 110 / 114 lm/W 15 W: 105 / 114 / 116 lm/W 20 W: 94 / 103 / 104 lm/W 24 W: 90 / 100 / 99 lm/W	24 W: 103 / 112 / 110 lm/W 28 W: 97 / 108 / 107 lm/W 31 W: 97 / 108 / 105 lm/W 35 W: 92 / 105 / 100 lm/W	24 W: 103 / 112 / 110 lm/W 28 W: 97 / 108 / 107 lm/W 31 W: 97 / 108 / 105 lm/W 35 W: 92 / 105 / 100 lm/W
CCT	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K
Dimensions	Ø72 x 165 mm	Ø72 x 165 mm	Ø80 x 184 mm	Ø80 x 184 mm
Beam Angle	24 - 60°	24 - 60°	24 - 60°	24 - 60°
Weight	0.60 kg	0.60 kg	0.70 kg	0.70 kg
Product Colour	White	Black	White	Black


COMMON SPECIFICATIONS

Body Material	Aluminium	Power Factor	> 0.9
Diffuser Material	Polycarbonate (Clear)	Protection	Overload / Short Circuit
IP Rating	IP20	Projected Lifespan	> 80,000hrs @Ta25°C (L80)
Adjustable Angle	0-350°	Operating Ambient Temperature	-20 to 35°C
CRI	> 90	Smart	KASTA Compatible
SDCM	< 3	Dimming	Non-Dimmable
Driver	Integral		
Input Voltage	220-240Vac, 50/60Hz		
Electrical Classification	Class II		

APPLICATIONS

- Hallways
- Retail Spaces
- Function Areas
- Cocktail Lounge
- Restaurant / Café

DIMENSIONS

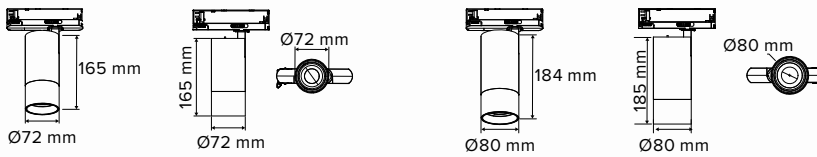

FOCI24W-W / FOCI24W-B

FOCI35W-W / FOCI35W-B




Note: FOCI G2 is suitable for universal track mounting. Track not included. See Haneco 3 Circuit Track (240V) for 1m and 3m options.

Find out more



Blend fitting into the existing environment seamlessly

Choice of colour finishes

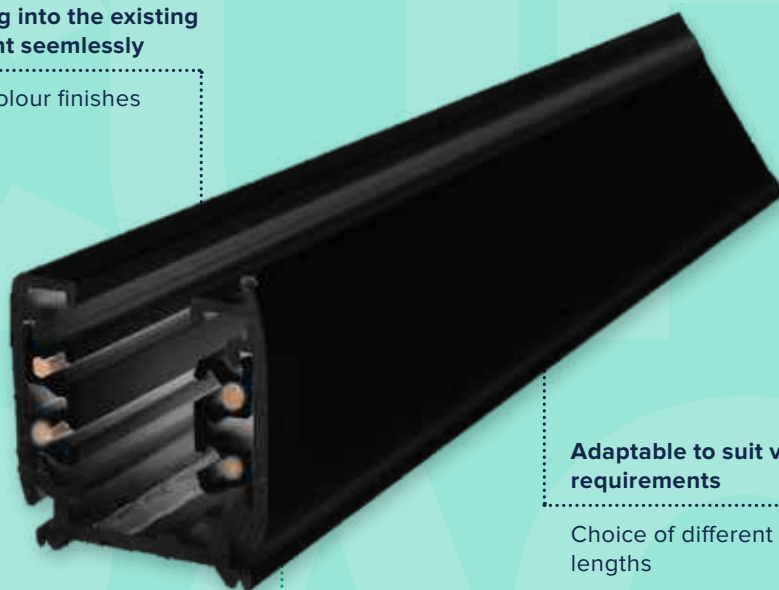

Adaptable to suit various requirements

Choice of different lengths

Expand the lighting possibilities with different mounting configurations

Versatile mounting options

3-CIRCUIT TRACK

Linear perfection and simplicity.

3 Circuit Track profile featuring a seamless linear aluminium body that offers an ambient operating temperature from -20°C to 50°C.

Find out more



IP20

Ingress Protection Rating



MODULAR

Flexible & Modular Design







1yr

Warranty





PRODUCT RANGE






Product Code	SMFWT-WH-1M	SMFWT-BK-1M	SMFWT-WH-3M	SMFWT-BK-3M
SAP Code	2000402	2000400	2000403	2000401
Product Colour	White	Black	White	Black
Body Material	Aluminium	Aluminium	Aluminium	Aluminium
Dimensions	1000mm x 32.4mm x 32.8mm	1000mm x 32.4mm x 32.8mm	3000mm x 32.4mm x 32.8mm	3000mm x 32.4mm x 32.8mm







Product Code	SMTCN-WH-90D	SMTCN-BK-90D	SMTCN-WH-180D	SMTCN-BK-180D
SAP Code	2000417	2000412	2000416	2000411
Product Colour	White	Black	White	Black
Body Material	Plastic	Plastic	Plastic	Plastic
Dimensions	2*98.5mm x 32mm x 33mm	2*98.5mm x 32mm x 33mm	165.5mm x 31.5mm x 31.5mm	165.5mm x 31.5mm x 31.5mm



Product Code	SMTCN-WH-FD	SMTCN-BK-FD	SMTCN-WH-INTFEED	SMTCN-BK-INTFEED
SAP Code	2000419	2000414	2000420	2000415
Product Colour	White	Black	White	Black
Body Material	Plastic	Plastic	Plastic	Plastic
Dimensions	226mm x 32mm x 30mm	226mm x 32mm x 30mm	98.5mm x 32mm x 33mm	98.5mm x 32mm x 33mm



Product Code	SMTCN-WH-ENDCAP	SMTCN-BK-ENDCAP	SUSPENSION-KIT-WH	SUSPENSION-KIT-BK
SAP Code	2000413	2000418	2000447	2000446
Product Colour	White	Black	White	Black
Body Material	Plastic	Plastic	Aluminium	Aluminium
Dimensions	33mm x 31mm x 31mm	33mm x 31mm x 31mm	Dia. 51mm x 33mm x 18mm 33mm x 33mm x 15mm	Dia. 51mm x 33mm x 18mm 33mm x 33mm x 15mm



Accessories

COUPLERS AND CONNECTORS



Product Code	FXDL-CABCNCTR	FXC-CABCNCTR	FXCW-CABCNCTR
SAP Code	2002466	2002499	2002500
Type	Cable Connector With Tail For White	Cable Connector With Tail For RGB	Cable Connector With Tail For RGBTW
Compatible With	FLEXION ^{SMOOTHLINE} (all models)	FXCRGB5M	FXCRGBTW5M



Product Code	FLEXS-P10MM-SLIM	FLEX-S-P-V2
SAP Code	2001553	2002227
Type	Cable Connector With Tail	145mm Cable Connector With Tail
Compatible With	FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)	FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)



Product Code	FLEX-S-S-V2
SAP Code	2002229
Type	150mm Long Cable
Compatible With	FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)



Product Code	FXDL-LNGCABJNR	FXC-CABJNR	FXCW-CABJNR
SAP Code	2002494	2002501	2002502
Type	Long Cable For White	Long Cable For RGB	Long Cable For RGBTW
Compatible With	FLEXION ^{SMOOTHLINE} (all models)	FXCRGB5M	FXCRGBTW5M



Product Code	FLEXCBL30M
SAP Code	2001039
Type	30m Strip Cable
Compatible With	FLEXION ^{SMOOTHLINE} (all models) FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)



Product Code	FLEXJNR-V2
SAP Code	2002225
Type	Joiner-Straight
Compatible With	FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)

COUPLERS AND CONNECTORS



Product Code	FXDL-JNR	FXC-JNR	FXCW-JNR
SAP Code	2002488	2002497	2002498
Type	Joiner-Straight For White	Joiner-Straight For RGB	Joiner-Straight For RGBTW
Compatible With	FLEXION ^{SMOOTHLINE} (all models)	FXCRGB5M	FXCRGBTW5M



Product Code	FLEXCNR-V2
SAP Code	2002226
Type	Joiner-Corner
Compatible With	FLEXION ^{G2 KIT} (all models) FLEXION ^{G2} (all models)



Product Code	FXDL-CNR
SAP Code	2002489
Type	Joiner-Corner For White
Compatible With	FLEXION ^{SMOOTHLINE} (all models)



Product Code	FXDL-CLIP
SAP Code	2002496
Type	Clip for White
Compatible With	FLEXION ^{SMOOTHLINE} (all models)



Product Code	FLEXSDL-V2
SAP Code	2002224
Type	Saddle
Compatible With	FLEXION ^{G2 KIT} (all models)



Product Code	FLEXCOVER-V2
SAP Code	2002223
Type	Terminal Cover for Sealant
Compatible With	FLEXION ^{G2 KIT} (all models)



Product Code	FLEXSEALER
SAP Code	2001372
Type	IP65 Sealer
Compatible With	FLEXION ^{G2 KIT} (all models)

NON-DIMMABLE 24V DRIVER

PRODUCT CODE	SAP CODE	WATT	INDOOR & OUTDOOR	IP RATING	MAXIMUM RUNING LENGTH							
					FLEXION ^{SMOOTHLINE}			FLEXION ^{G2}			FLEXION ^{RGB}	
					6W/m	9W/m	14W/m	5W/m	8W/m	15W/m	RGB	RGBTW
HN-0012-24V	2001306	12	Indoor	IP20	2 m	1.25 m	0.75m	2.25m	1.5m	0.75m	2m	2m
HN-0040-24V	2000918	40	Indoor	IP20	6.5m	4.25m	2.75m	8m	5m	2.5 m	5m	5m
HN-0075-24V-IP20	2000988	75	Indoor	IP20	10m	8.25m	5.25m	10 m	9.25 m	5 m	5m	5m
HN-0075-24V-IP65	2000611	75	Outdoor	IP67	10 m	8.25m	5.25m	10 m	9.25 m	5 m	5m	5m
HN-0100-24V-IP20	2001918	100	Indoor	IP20	10 m	10 m	7 m	10 m	10 m	6.5 m	5m	5m
HN-0100-24V-IP67	2000613	100	Outdoor	IP67	10 m	10 m	7 m	10 m	10 m	6.5 m	5m	5m
HN-0150-24V	2000616	150	Outdoor	IP67	10 m	10 m	10 m	10 m	10 m	10 m	5m	5m
HN-0240-24V	2000265	240	Outdoor	IP67	10 m	10 m	10 m	10 m	10 m	10 m	5m	5m

PHASE-CUT DIMMABLE 24V DRIVER

PRODUCT CODE	SAP CODE	WATT	INDOOR & OUTDOOR	IP RATING	MAXIMUM RUNING LENGTH					
					FLEXION ^{SMOOTHLINE}			FLEXION ^{G2}		
					6W/m	9W/m	14W/m	5W/m	8W/m	15W/m
HD-0025-24V	2000828	25	Indoor	IP20	4 m	2.5 m	1.75 m	5 m	3 m	1.5 m
HD-0050-24V	2000829	50	Indoor	IP20	8.25 m	5.5 m	3.5 m	10 m	5.25 m	3.25 m
HD-0100-24V	2001826	100	Indoor	IP20	10 m	10 m	7 m	10 m	10 m	6.5 m
HD-0200-24V	2000830	200	Outdoor	IP67	10 m	10 m	10 m	10 m	10 m	10 m

