






OYSTERS

PURO ^{G4}	178
PURO ^{SLIM}	182
DISCUS	184

PURO

G4

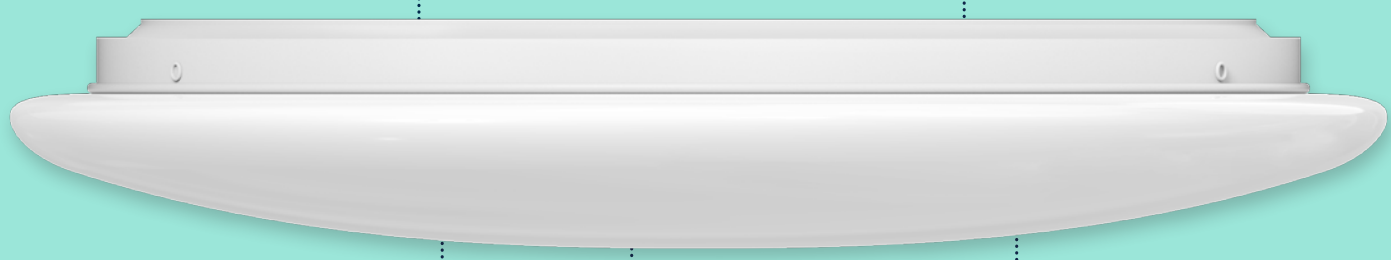

Provides the choice of light hues from a single luminaries

Tritone colour selectable

Adjustable brightness to improve comfort

Dimmable driver

Suitable for wet or damp areas and keeps insects out

IP54 rating (from below)

Increase productivity and lowers eye strain

Flicker-free driver*

Adaptable to suit various requirements

Choice of sizes to choose from

PURO^{G4}

General purpose oyster lighting.

The PURO G4 oyster light is designed to provide smooth light distribution, tritone colour capabilities, unmatched durability and an inbuilt dimmable driver featuring flicker-free technology. Various sizes and sensor/emergency models are available, making PURO G4 the perfect all-round oyster light.

 TRITONE Colour Selectable	 POWER Switchable Modes	 IP54 Ingress Protection Rating
 DIM Phase Cut Dimming	 50,000hr Projected Lifespan	 5yr Warranty

*Model dependent

PRODUCT RANGE



Product Code	PURO11W-250R	PURO14W-300R	PURO14W-300R-MS	PURO18W-350R
SAP Code	2002371	2002372	2002373	2002374
Power	8 / 10 / 11 W	8 / 10 / 11 / 14 W	8 / 10 / 11 / 15 W	9 / 12 / 18 W
Lumen Output	8 W: 680 / 752 / 730 lm 10 W: 890 / 979 / 950 lm 11 W: 960 / 1112 / 1080 lm	8 W: 680 / 752 / 730 lm 10 W: 890 / 979 / 950 lm 11 W: 980 / 1082 / 1050 lm 14 W: 1200 / 1391 / 1350 lm	8 W: 680 / 752 / 730 lm 10 W: 890 / 979 / 950 lm 11 W: 980 / 1082 / 1050 lm 15 W: 1200 / 1391 / 1350 lm	9 W: 850 / 927 / 900 lm 12 W: 1120 / 1236 / 1200 lm 18 W: 1700 / 1854 / 1800 lm
Efficacy	8 W: 91 / 100 / 97 lm 10 W: 94 / 103 / 100 lm 11 W: 87 / 101 / 98 lm	8 W: 91 / 100 / 97 lm 10 W: 94 / 103 / 100 lm 11 W: 89 / 98 / 95 lm 14 W: 86 / 99 / 96 lm	8 W: 85 / 94 / 91 lm 10 W: 89 / 98 / 95 lm 11 W: 85 / 94 / 91 lm 15 W: 83 / 99 / 93 lm	9 W: 94 / 103 / 100 lm 12 W: 93 / 103 / 100 lm 18 W: 100 / 109 / 106 lm
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø250 x 70 mm	Ø300 x 75 mm	Ø300 x 75 mm	Ø350 x 70 mm
Weight	0.40 kg	0.54 kg	0.55 kg	0.60 kg
Product Colour	White	White	White	White
Model Variant	Standard	Standard	Intellisensor	Standard
Dimmable	Phase-Cut Dimmable (Trailing Edge, 10-100%)	Phase-Cut Dimmable (Trailing Edge, 10-100%)	Non-Dimmable	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Operating Ambient Temperature	-20 to 45°C	-20 to 45°C	-20 to 45°C	-20 to 45°C



Product Code	PURO18W-350R-MS	PURO24W-400R	PURO24W-400R-MS
SAP Code	2002375	2002376	2002377
Power	9 / 12 / 18 W	11 / 14 / 22 W	12 / 15 / 24 W
Lumen Output	9 W: 850 / 927 / 900 lm 12 W: 1120 / 1236 / 1200 lm 18 W: 1700 / 1854 / 1800 lm	11 W: 1080 / 1185 / 1150 lm 14 W: 1360 / 1494 / 1450 lm 22 W: 1700 / 1854 / 1800 lm	12 W: 1080 / 1185 / 1150 lm 15 W: 1360 / 1494 / 1450 lm 24 W: 2125 / 2318 / 2250 lm
Efficacy	9 W: 89 / 98 / 90 lm 12 W: 90 / 99 / 96 lm 18 W: 97 / 106 / 103 lm	11 W: 89 / 98 / 90 lm 14 W: 90 / 99 / 96 lm 22 W: 97 / 106 / 103 lm	12 W: 94 / 103 / 100 lm/W 15 W: 94 / 103 / 100 lm/W 24 W: 94 / 105 / 100 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø350 x 70 mm	Ø400 x 65 mm	Ø400 x 65 mm
Weight	0.61 kg	0.83 kg	0.84 kg
Product Colour	White	White	White
Model Variant	Intellisensor	Standard	Intellisensor
Dimmable	Non-Dimmable	Phase-Cut Dimmable (Trailing Edge, 10-100%)	Non-Dimmable
Operating Ambient Temperature	-20 to 45°C	-20 to 45°C	-20 to 45°C



Product Code	PURO25W400R-EM	PURO25W-EM-MS
SAP Code	2001989	2001991
Power	25 W	25 W
Lumen Output	2000 / 2220 / 2070 lm	2125 / 2415 / 2250 lm
Efficacy	85 / 97 / 90 lm/W	85 / 97 / 90 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø400 x 121 mm	Ø400 x 121 mm
Weight	1.35 kg	1.30 kg
Product Colour	White	White
Model Variant	Emergency	Intellisensor + Emergency
Dimmable	Non-Dimmable	Non-Dimmable
Operating Ambient Temperature	0 to 40°C	0 to 40°C

Find out more




COMMON SPECIFICATIONS

Body Material	Steel	Input Voltage	220-240Vac, 50/60Hz
Diffuser Material	PMMA	Electrical Classification	Class I
IK Rating	IK04	Power Factor	> 0.9
IP Rating	IP54	Protection	Overload / Short Circuit
Beam Angle	120°	Projected Lifespan	50,000hrs @Ta25°C (L80)
CRI	> 80	Smart:	KASTA Compatible
SDCM	< 5		
Driver	Integral		
Power Connection	PA14 Terminals		


APPLICATIONS

Bedroom
 Lounge Room
 Dining Area
 Laundry
 Hallway
 Walk-In Wardrobes
 Garage
 Education Facilities
 Hotel Common Areas
 Hotel Rooms
 Store Rooms
 Staircase
 Temporary installations


DIMENSIONS





PURO11W-250R





PURO14W-300R / PURO14W-300R-MS



PURO18W-350R / PURO18W-350R-MS



PURO24W-400R / PURO24W-400R-MS

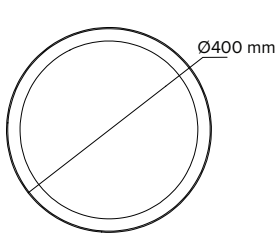

PURO25W400R-EM / PURO25W-EM-MS



Modern aesthetic for sleek unobtrusive appearance

Low profile design

Adjustable brightness to improve visual comfort

Dimmable driver



Suitable for wet or damp areas and keeps insects out

IP54 rating

Increase productivity and lowers eye strain

Flicker-free driver

Reduced risk of electric shock

Class II electrical classification

PURO^{SLIM}

Minimalist design, maximum impact.

PURO SLIM is a sleek, IP54-rated LED ceiling light designed for optimal performance in general lighting applications. Its slim 26mm profile and even light distribution create a modern, minimalist aesthetic. With adjustable colour temperature options, three size variations and available in black and white finishes, the PURO SLIM adapts seamlessly to diverse residential settings.



PRODUCT RANGE



Product Code	PUROSL13W-250R	PUROSL13W-250RBK	PUROSL17W-300R	PUROSL17W-300RBK
SAP Code	2002532	2002533	2002534	2002535
Power	13 W	13 W	17 W	17 W
Lumen Output	1196 / 1290 / 1271 lm	1196 / 1290 / 1271 lm	1490 / 1625 / 1603 lm	1490 / 1625 / 1603 lm
Efficacy	92 / 99 / 98 lm/W	92 / 99 / 98 lm/W	88 / 96 / 94 lm/W	88 / 96 / 94 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø244 x 26 mm	Ø244 x 26 mm	Ø294 x 26 mm	Ø294 x 26 mm
Weight	0.47 kg	0.47 kg	0.60 kg	0.60 kg
Product Colour	White	Black	White	Black



Product Code	PUROSL24W-400R	PUROSL24W-400RBK
SAP Code	2002536	2002537
Power	24 W	24 W
Lumen Output	2363 / 2609 / 2528 lm	2363 / 2609 / 2528 lm
Efficacy	98 / 109 / 105 lm/W	98 / 109 / 105 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø400 x 26 mm	Ø400 x 26 mm
Weight	1.00 kg	1.00 kg
Product Colour	White	Black




COMMON SPECIFICATIONS

Body Material	Polypropylene	Input Voltage	220-240Vac, 50/60Hz
Diffuser Material	PMMA	Electrical Classification	Class II
IP Rating	IP54	Power Factor	> 0.9
Beam Angle	110°	Protection	Overload / Short Circuit
CRI	> 80	Projected Lifespan	> 85,000hrs @Ta45°C (L80)
SDCM	< 5	Operating Ambient Temperature	-20 to 45°C
Driver	Integral	Dimming	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Flicker Free	Yes		
Power Connection	PA10 Terminals		

APPLICATIONS

- Bedrooms
- Lounge Room
- Dining Area
- Laundry
- Hallways
- Staircase
- Walk-in Wardrobes
- Garage
- Education Facilities
- Hotel Common Areas
- Hotel Rooms
- Storage Rooms
- Temporary Installations

DIMENSIONS

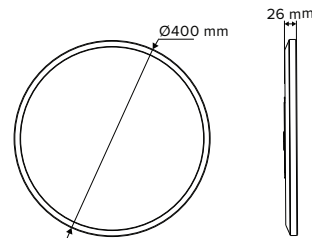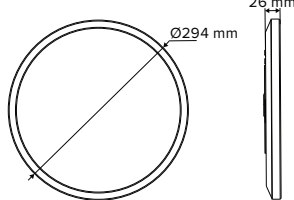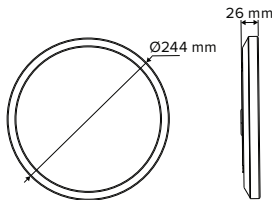

PUROSL13W-250R / PUROSL13W-250RBK

PUROSL17W-300R / PUROSL17W-300RBK

PUROSL24W-400R / PUROSL24W-400RBK

Find out more



DISCUS



DISCUS

Super slim profile.

DISCUS is a sleek, aesthetically pleasing oyster with a slim body profile and IP54 protection rating that makes this fitting the ideal choice in both indoor and outdoor applications. Intellisensor (MS) and emergency (EM) versions make sure all bases are covered.

 TRITONE Colour Selectable	 IP54 Ingress Protection Rating	 IK08 Impact Rating
 CLASS II Double Insulated	 YES Gov Rebate	 5yr Warranty

PRODUCT RANGE



Product Code	DISC12W250R	DISC25W300R	DISC25W300R-EM	DISC25W300R-MS
SAP Code	2001934	2001935	2001936	2001937
Power	12 W	25 W	25 W	25 W
Lumen Output	1190 / 1260 / 1210 lm	2040 / 2190 / 2080 lm	2040 / 2190 / 2080 lm	2040 / 2190 / 2080 lm
Efficacy	99 / 105 / 101 lm/W	81 / 87 / 83 lm/W	81 / 87 / 83 lm/W	81 / 87 / 83 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø250 x 40 mm	Ø300 x 38 mm	Ø300 x 49 mm	Ø300 x 49 mm
Weight	0.70 kg	1.10 kg	1.25 kg	0.90 kg
Product Colour	White	White	White	White
Model Variant	Standard	Standard	Emergency	Intellisensor
Operating Ambient Temperature	-20 to 45°C	-20 to 45°C	0 to 45°C	-20 to 45°C



Product Code	DISC25W-EM-MS	DISC30W400R
SAP Code	2001938	2001939
Power	25 W	30 W
Lumen Output	2040 / 2190 / 2080 lm	2800 / 3040 / 2910 lm
Efficacy	81 / 87 / 83 lm/W	93 / 101 / 97 lm/W
CCT	3000 / 4000 / 5700 K	3000 / 4000 / 5700 K
Dimensions	Ø300 x 49 mm	Ø400 x 45.5 mm
Weight	1.00 kg	1.60 kg
Product Colour	White	White
Model Variant	Intellisensor + Emergency	Standard
Operating Ambient Temperature	0 to 45°C	-20 to 45°C


COMMON SPECIFICATIONS

Body Material	Polycarbonate	Input Voltage	220-240Vac, 50/60Hz
Diffuser Material	PMMA (Acrylic)	Electrical Classification	Class II
IP Rating	IP54	Power Factor	> 0.9
IK Rating	IK08	Protection	Overload / Short Circuit
Beam Angle	115°	Projected Lifespan	> 50,000hrs @Ta25°C (L70)
CRI	> 80	Dimming	Phase-Cut Dimmable (Trailing Edge, 10-100%) (EM and Sensor models are non dimmable)
SDCM	< 5		
Driver	Integral		
Power Connection	Terminal Block		

APPLICATIONS

- Entrance
- Balconies / Patios / Verandahs
- Awnings
- Carport
- Side of Building
- Education Facilities
- Public Facilities
- Cool Rooms
- Area Lighting

DIMENSIONS

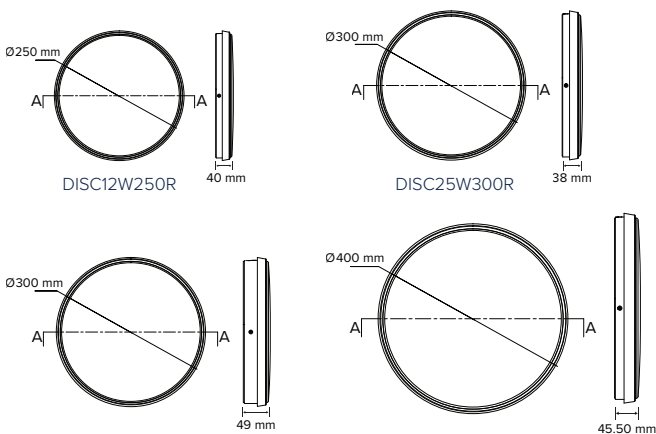

DISC25W300R-EM / DISC25W300R-MS / DISC25W-EM-MS

DISC30W400R

Find out more

