


TRIPROOF

TRIPROOF20/40W12-5K

SAP CODE: 2000665

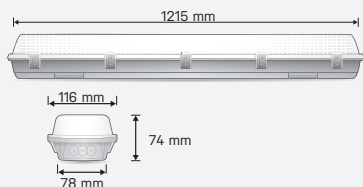

1200mm, 20/40W
Ecoswitch, 5000K,
rugged indoor/outdoor
LED batten


A robust outdoor/indoor IK08
vandal resistant LED batten
with Ecoswitch, a switch to
select 20 or 40W.

Accessories

SUSPENSION KIT; WIREGUARD



Photometric
Diagram



Unit: cd
- C0/180 110.0deg
- C90/270 110.0deg

KEY INFORMATION

Lumen Output ^{40W}	4160lm
- Low Power Mode ^{20W}	1860lm
Input Power	40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 41.85

PHOTOMETRIC

Efficacy ^{40W}	104lm/W
- Low Power Mode ^{20W}	93lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	60-20VDC
Power Factor	>0.9
LED Input Current (nominal)	300-700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Bracket
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1215x75x116mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP