Battens & LED Tubes

HANECO
IDEAS THAT SHINE

VISTA

VISTA20/40W12-6K-EM
SAP CODE: 2000489

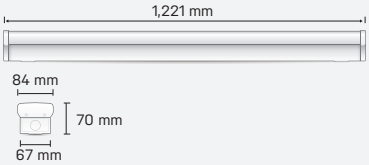

600mm, 20W, 5700K, Emergency, conventional appearance LED batten

An LED replacement for conventional battens with an emergency battery for power failures.

Accessories
WIREGUARD

Photometric Diagram



Unit: cd
– C0/180 110.0deg
– C90/270 110.0deg

KEY INFORMATION

Lumen Output 40W	4180lm
- Low Power Mode 20W	2420lm
Input Power	40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy 40W	104lm/W
- Low Power Mode 20W	121lm/W
LED	SMD
CCT	6000K
CRI	>80
Beam Angle	115°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	60-20VDC
Power Factor	>0.9
LED Input Current (nominal)	700-300mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1223x82x67mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP

Specification subject to change without prior notice. Last updated **15/10/2018**

HANECO
IDEAS THAT SHINE

Emergency Battery

VISTA-EM-Battery

SAP CODE: 2001430

Self charging battery for VISTA20/40W12-6K-EM during blackouts

Emergency Light Kit ensures that lights remain on at a light level sufficient to allow people to see their way for three hours if there is a power failure

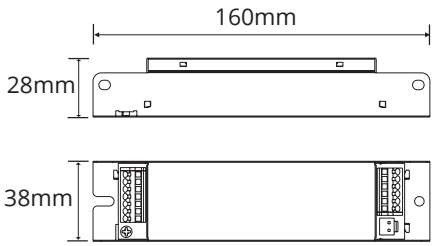

QUICK FACTS

- Self charging Ni-Cd battery
- Keeps lights on at emergency level for three hours
- Test switch and indicator light

SPECIFICATIONS

Max Battery Temperature	70°
Battery Warranty	1 Year
Emergency Classification	C0-180° D50 C90-270° D25

MAXIMUM SPACINGS FOR CLASS D LUMINAIRES

Maximum Spacings Mounting Height (Metres)
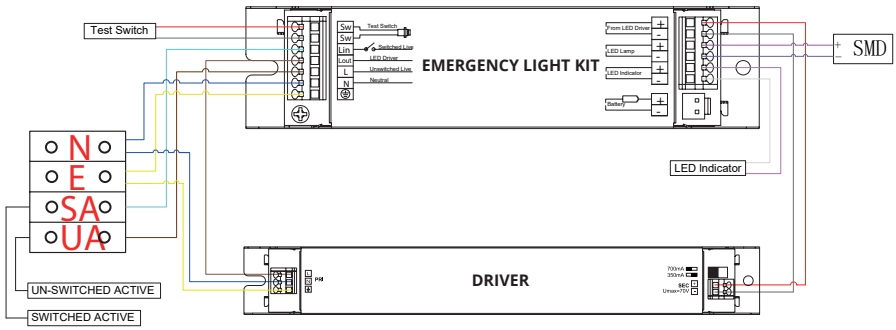
Luminaire Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10	15	20
D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3	7.7	
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6	
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7	15.2
D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0	22.5