Battens & LED Tubes

VISTA

VISTA25W06-6K-EM

SAP CODE: 2000680

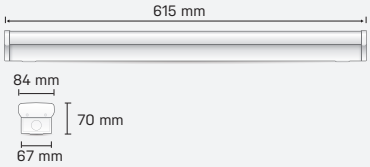

600mm, 25W, Tritone, conventional appearance LED batten

A powerful LED replacement for conventional battens.

Accessories

WIREGUARD

Photometric Diagram



Unit: cd
– C0/180 110.0deg
– C90/270 110.0deg

KEY INFORMATION

Lumen Output	1810lm
Input Power	25W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	72lm/W
LED	SMD
CCT	6000K
CRI	>80
Beam Angle	115°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	57-19VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	0.8kg
Dimensions	615x84x70mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP

Specification subject to change without prior notice. Last updated **15/10/2018**

Dimmers, Drivers & Smart Controls

HANECO
IDEAS THAT SHINE

Emergency Battery

VISTA-EM-Battery
SAP CODE: 2001430

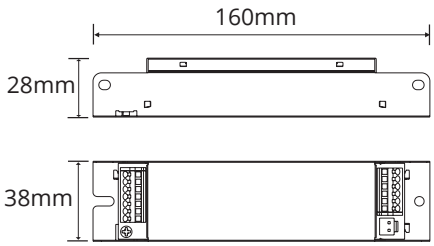

Self charging battery for VISTA25W06-6K-EM during blackouts

Emergency Light Kit ensures that lights remain on at a light level sufficient to allow people to see their way for three hours if there is a power failure

QUICK FACTS

- Self charging Ni-Cd battery
- Keeps lights on at emergency level for three hours
- Test switch and indicator light

SPECIFICATIONS

Max Battery Temperature	70°
Battery Warranty	1 Year
Emergency Classification	C0-180° D50 C90-270° D25

MAXIMUM SPACINGS FOR CLASS D LUMINAIRES

Maximum Spacings Mounting Height (Metres)
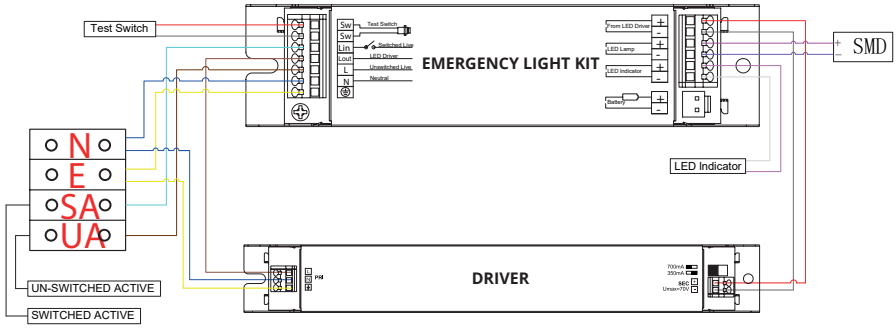
Luminaire Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10	15	20
D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3	7.7	
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6	
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7	15.2
D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0	22.5