Fixed Downlights

VIVALITE

VIVALITE9W110-W-3K

SAP CODE: 2001580

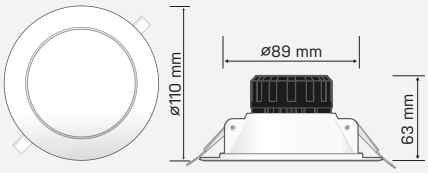

Flush opal diffuser LED downlight

3000K, white trim, IC-4 rated LED downlight with flex and plug.

Photometric Diagram



Unit: cd
– C0/180 90.0deg
– C90/270 90.0deg

KEY INFORMATION

Lumen Output	710lm
Input Power	9W
Hole Cutout Size	Ø90-100mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	3yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	

PHOTOMETRIC

Efficacy	79lm/W
LED	SMD
CCT	3000K
CRI	>80
Beam Angle	90
MacAdam (SDCM)	≤ 2

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	N/A
Power Factor	>0.9
LED Input Current (nominal)	N/A
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium + Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	0.25kg
Dimensions	Ø110 x 63mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.

Specification subject to change without prior notice. Last updated 07/03/2019