


DURA-SENKIT^{G2}

DURA-SENKIT-G2

SAP CODE: 2002605

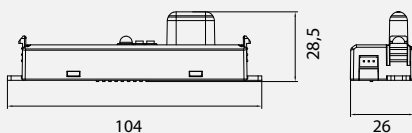

The DURA G2 Sensor-Kit is a modular, plug-and-play accessory engineered to enhance the functionality of the DURA G2 batten range. Designed for seamless integration, this kit enables intelligent motion sensing across both standard and emergency models, offering a streamlined solution for energy efficiency and automated lighting control.



PRODUCT INFORMATION

Compatible Models	DURA06-G2
	DURA06-EM-G2
	DURA12-G2
	DURA-12-EM-G2
Dimensions (LxW)	104x26x28.5mm
Housing Colour	Clear
Weight	30g
Operating Temperature	-25 to 60°C
Input Current(mA)	20mA
Input Voltage	12V

SENSOR

Sensor Type	Microwave Motion + Daylight
Hold Time	5s, 30s, 3min, 10min
Detection Radius	≥4m @3 m height Ceiling mount
Maximum Mounting Height	6m
Stand-by Period	0s, 1min, 10min, +∞
Stand-by Dim Level	20%, 30%
Daylight Threshold	15Lux, 50Lux, 150Lux, Disable
Detection Sensitivity	100%, 75%, 50%, 25%
Default Settings	Hold Time: 3 min; Stand-by Period: 10 min; Stand-by Dim Level: 20%; Daylight Threshold: 50Lux; Detection Sensitivity: 100%;

OTHER

Warranty	5 yrs
----------	-------