


METEOR


Thanks for choosing our second generation METEOR LED surface mount downlight products.

We strongly recommend that you read this manual carefully before installation.


Installation Instructions



1. Switch OFF main power
2. Drill holes in mounting surface and install plug anchors.

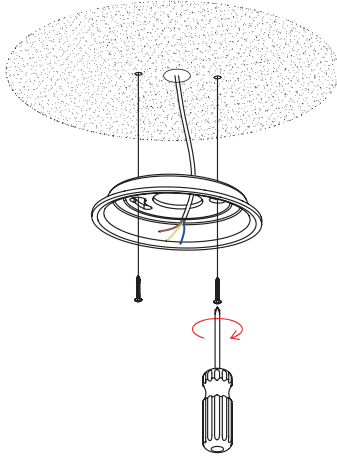


3. Install mounting bracket to surface.

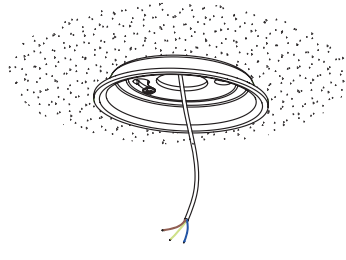


	3000K
	4000K
	5000K


4. Select colour temperature using slide switch.

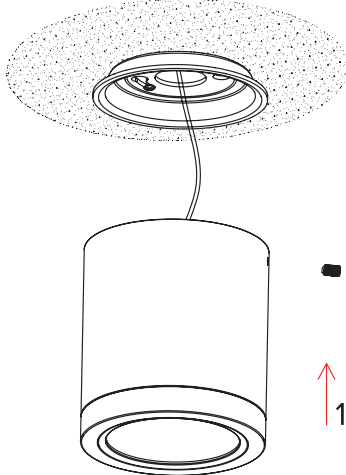

6. Secure fitting on mounting bracket using screws supplied.

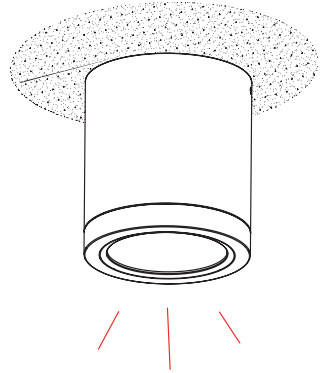

1. Switch ON main power

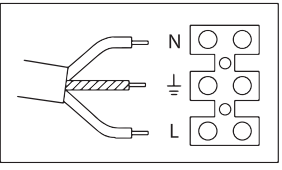

5. Wire the fitting as diagram above

WARNING

- The luminaire must be installed by professional electrician.
- Switch power off when wiring the luminaire.
- Ensure input voltage conforms to the voltage range of product.
- Ensure wires are securely connected.
- Before switching on, ensure that all the wiring is correct.
- The warranty is void if product is not installed according to the instructions.

Product Code: **M13W90R-WH -TRI**
M13W90R-BK-TRI
M20W130R-WH-TRI
M20W130R-BK-TRI
M35W160R-WH-TRI
M35W160R-BK-TRI