


PURO 400 Multi

CL25W400R-MULTI

SAP CODE: 2000112

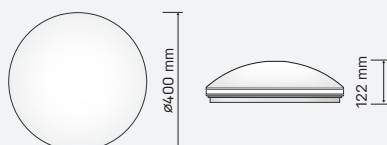


25W, indoor,
Tritone three colour
temperature, LED oyster

An indoor oyster light
with 3 switchable colour
temperatures.



Photometric
Diagram



Unit: cd
- C0/180 120.0deg
- C90/270 120.0deg

KEY INFORMATION

Lumen Output	1680 / 1840 / 1800lm
Input Power	25W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 23.96

PHOTOMETRIC

Efficacy	67 / 74 / 72lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	14-42VDC
Power Factor	>0.9
LED Input Current (nominal)	600mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	PMMA (acrylic)
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	0.8kg
Dimensions	Ø400x122mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP