



AURORA SQUARE

Commercial Downlights


CLASS 2
Double Insulated


DIM
Phase Cut
Dimming


IP54
Ingress
Protection
Rating


IP40
Ingress
Protection
Rating


50,000hr
Expected
Lifetime


5yr
Warranty

Recessed contemporary design.

The distinctive and stylish AURORA SQUARE range offers an aesthetically pleasing appearance in high end architectural applications where functionality meets form.

Features

- Low glare square recessed opal diffuser
- 4 different sizes
- Aluminium housing
- Remote phase-cut dimmable driver
- Complete with flex and plug

Benefits

- Smooth appearance and visual comfort
- Extended application possibilities
- Improved thermal characteristics
- Enhanced comfort and energy saving
- Quick and easy installation

Product Overview

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	SAP CODE	PRODUCT CODE
13W	830 lm	82 lm/W	3000K	90 x 90mm	0.70kg	2000053	AURORASQ115A01
	910 lm		5000K			2000054	AURORASQ115A02
18W	1380 lm	99 lm/W	5000K	125 x 125mm	0.70kg	2000056	AURORASQ150A02
26W	2010 lm	95 lm/W	4000K	160 x 160mm	1.30kg	2000058	AURORASQ190A4K
	2070 lm		5000K			2000057	AURORASQ190A02
28W	3284 lm	86 lm/W	3000K	200 x 200mm	1.40kg	2000059	AURORASQ220A01
	3060 lm		4000K			2000061	AURORASQ220A4K
	3017 lm		5000K			2000060	AURORASQ220A02

Commercial Downlights

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Opal)	Power Lead:	1.1m Flex & Plug
Fascia colour:	White: W101 / 80	Link Lead:	350/450mm Cable with Connector
IP Rating:	Front: IP54 (13W-18W)	Input:	220-240V, 50/60Hz
	Body: IP54 (13W-18W) IP40 (26W-28W)	Electrical Classification	Class 2
Beam Angle:	90°	Power Factor:	>0.9
CRI:	>80 (>90 option)	Protection:	Overload / Short Circuit
SDCM:	<5 (<3 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
		Operating Ambient Temperature:	-20 to 45°C
		Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge)
			DALI Dimmable Models Available. See Page 212.


APPLICATIONS

Retail
Offices
Residential



DIMENSIONS

Product Code:	AURORASQ115	AURORASQ150	AURORASQ190	AURORASQ220
Width:	115mm	150mm	190mm	220mm
Height:	64mm	64mm	54mm	67mm
Cut Out:	90 x 90mm	125 x 125mm	160 x 160mm	200 x 200mm
Remote Driver:	104 x 40 x 28mm	113 x 45 x 28mm	153 x 45 x 22mm	155 x 45 x 30mm

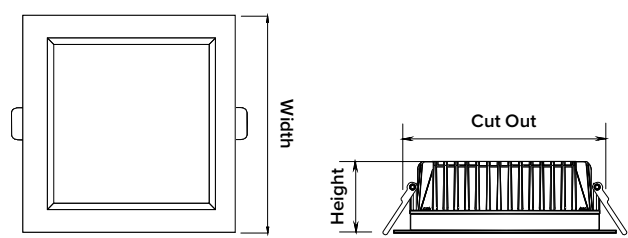

FIND OUT MORE:

