

DUET IP65

DUETIP65
SAP CODE: 2002772



Dual directional for egress pathways with IP65 protection

DUET IP65 Flood Light provides powerful emergency illumination for both large and small areas, helping to ensure clear visibility during an emergency. With dual adjustable lamps, DUET delivers broad and flexible illumination to help building occupants safely find their way to designated exits and facilitate an efficient evacuation.


APPLICATIONS

Laundry, Hallways, Entrance, Staircase, Theatre Rooms, Carpark, Food Courts, Restaurants / Cafes, Storage Facilities, Manufacturing Facilities, Temporary Installations, Indoor Recreation, General Industrial, Kitchen / Food Prep, Warehouses

DIMENSION DIAGRAMS

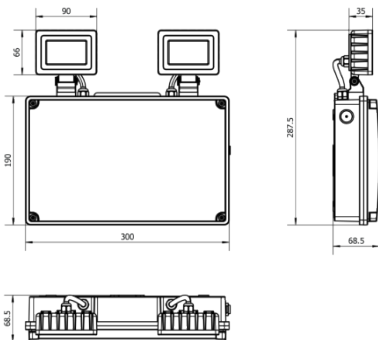

PHOTOMETRIC DIAGRAM



UNIT: cd
C0/180 97.9°
C30/210 99.0°
C60/240 97.2°
C90/270 94.3°

Photometric diagram shown is for 6500K output.

KEY INFORMATION

Power	4.5 W
Lumen Output	1329 lm
Viewing Distance	1329 lm
Mounting Type	Surface Mount
Body Colour	Grey
IP Rating	IP65
IK Rating	IK07
Operating Ambient Temp.	0 to 45°C
Warranty	5 yrs
Battery Warranty	1 yr

PHOTOMETRIC

CCT	6500 K
CRI	> 80
Beam Angle	100°

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Electrical Classification	Class II
Power Charging	4.5 W
Power Standby	0.6 W

EMERGENCY INFORMATION

Test Type	Self-Test
Battery Type	LiFePO4 6.6V
Recharge Time	16 hrs
Discharge Time	1.5 hrs
Emergency Classification	C0: D100, C90: D100

OTHERS

Body Material	Polycarbonate
Diffuser Material	Polycarbonate
Dimensions	300 x 287.5 x 68.5 mm