



ESODO EDGE G2

ESD24M-SM-G2

SAP CODE: 2002711


Architectural slimline design.

ESODO EDGE G2 is a super slim, double sided LED emergency exit sign with self-test function for multiple surface mounting options. With its blade style and slick edge-lit design ESODO EDGE G2 will also provide safety in high end architectural applications.


APPLICATIONS

Laundry, Hallways, Entrance, Theatre Rooms, Carpark, Showrooms, Offices, Function Areas, Food Courts, Hotel Common Areas, Restaurants / Cafes, Retail Spaces, Storage Facilities, Manufacturing Facilities, Kitchen / Food Prep

DIMENSION DIAGRAMS

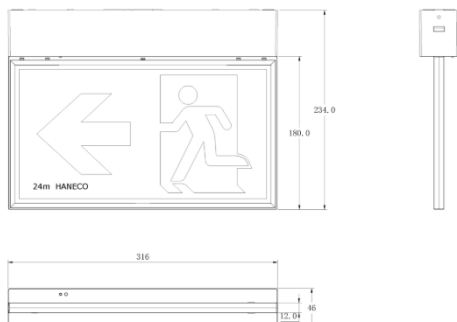

PHOTOMETRIC DIAGRAM

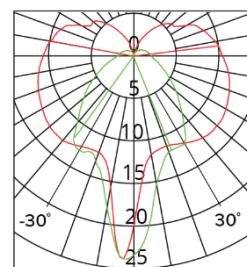

Unit: cd

—C0/180 197.3deg

—C90/270 57.7deg

KEY INFORMATION

Power	4.5 W
Lumen Output	35 lm
Viewing Distance	35 lm
Mounting Type	Surface Mount
Body Colour	White
IP Rating	IP20
IK Rating	Not applicable
Operating Ambient Temp.	0 to 40°C
Warranty	5 years
Battery Warranty	1 year

PHOTOMETRIC

CCT	6500 K
CRI	> 80

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Electrical Classification	Class II
Power Charging	4.5 W
Power Standby	3.5 W
Surge Protection	Overload / Short Circuit

EMERGENCY INFORMATION

Test Type	Self Test: Yellow flashing (2s ON / 2s OFF) Manual Test: Yellow flashing (1s ON / 1s OFF)
Battery Type	LiFePO4 3.2V
Recharge Time	16 hrs
Discharge Time	1.5 hrs
Emergency Classification	C0: D10 C90: D4

OTHERS

Body Material	Polycarbonate / PMMA
Diffuser Material	Acrylic
Weight	0.6 kg
Dimensions	316 x 46 x 234 mm