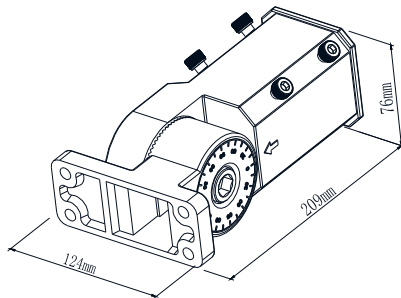# PARX^G2 Mounting Supports
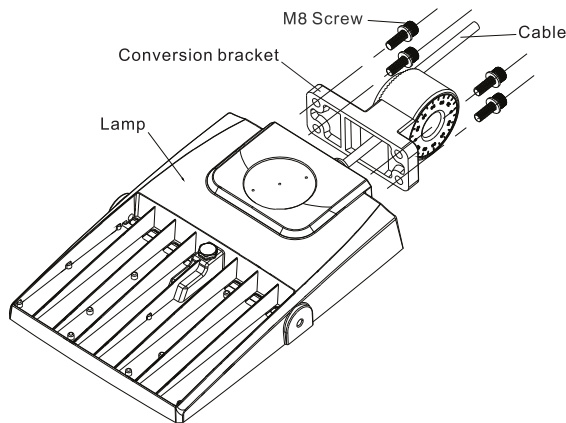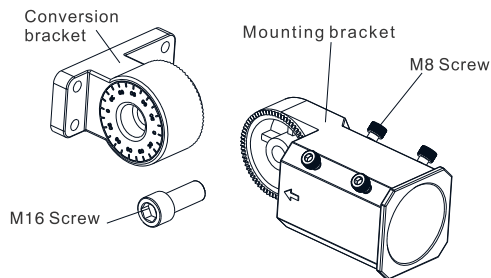
Product Code: PARX-ADJ-SPIGOT

Thanks for choosing our PARX^G2 batten Slip Fitter Bracket.
We strongly recommend that you read this manual carefully before installation.

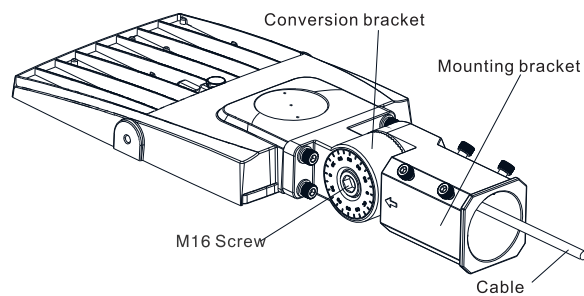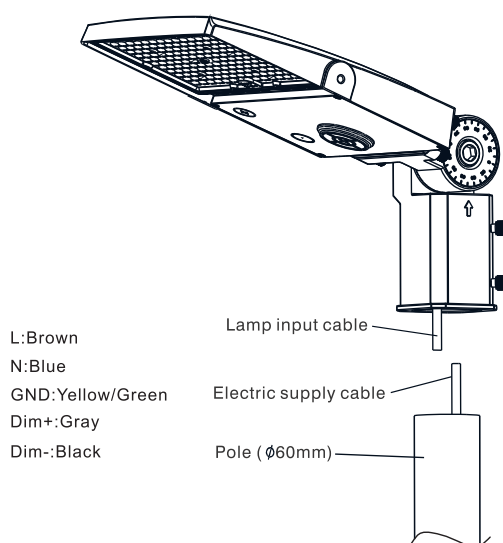PARX75W | PARX150W | PARX200W | PARX300W
PARX-ADJ-SPIGOT

Steps:

76mm
209mm
124mm

1. Disassemble the slip fitter bracket.

Conversion bracket
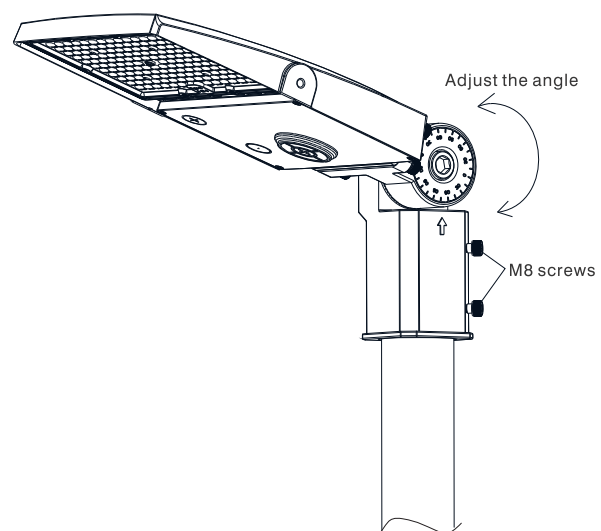Mounting bracket
M8 Screw
M16 Screw

M8 Screw
Cable
Conversion bracket
Lamp

2. The cable passes through the conversion bracket and is fixed conversion bracket to the lamp with M8 screws.

Conversion bracket
Mounting bracket
M16 Screw
Cable

3. The cable passes through the mounting bracket; The mouting bracket and conversion bracket are fixed together with M16 screws.

L:Brown
N:Blue
GND:Yellow/Green
Dim+:Gray
Dim-:Black

Lamp input cable
Electric supply cable
Pole (φ60mm)

4. Connect the input line of the lighting fixture to the municipal power line.

Adjust the angle
M8 screws

5. The wires are hidden inside the lamp pole; The lamp is fixed to the lamp ploe with M8screws. Adjust the light output angle of the lamp.

HANECO

For more information
www.haneco.com.au
1300 001 LED

Lighting Council
AUSTRALIA MEMBER

Last updated 27/01/26