

SENTURA Sensor

SEN-PIR360RC-SM-W



PIR MOTION SENSOR 360° RECESSED OR SURFACE MOUNT W/ OVERRIDE WHITE


FEATURES

- Can be recessed or surface mounted using the included kit
- Detects small movements (presence) in inner detection zone
- Detects larger movements (motion) in outer detection zone
- Suitable for desk-based presence detection and larger areas like corridors
- Adjustable LUX, Time, Sensitivity settings
- Control up to Max. 400W LED
- 5 year warranty


SPECIFICATIONS

Power Supply	220-240V a.c. 50Hz
Operating Ambient Temperature	-10 to 40°C
Operating Humidity	<93% RH
IP Rating	IP20
Connection Type	Terminals
Rated Load	Max. 800W (incandescent) / Max. 400W (LED)
Detection Angle	360°
Detection Range	Up to 6m (<24°C)
Installation Height	2.2 - 4m
Cutout	Ø60mm
Time Delay	10 sec (±3s) to 15 min (±2min)
Ambient Light Control	<10-2000 LUX (adjustable)
Standby Power	<0.5W
Standards Complied	AS/NZS 60669.1 AS/NZS 60669.2.1

CONNECTION

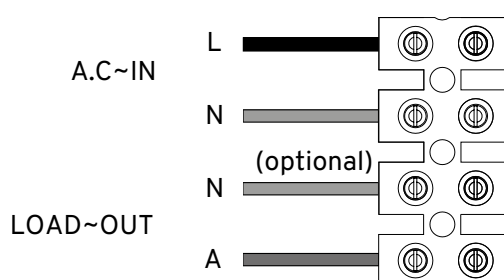

DIMENSIONS

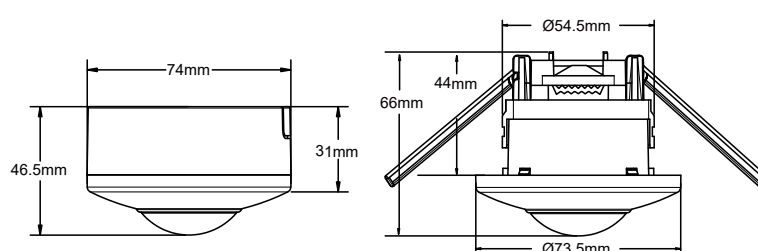

DETECTION AREA

