


## STAX<sup>ECO</sup> MULTI

STAX50W-TRI  
SAP CODE: 2002131

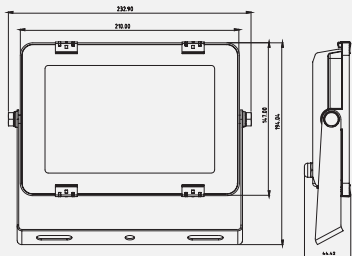


### A versatile and efficient LED floodlight

The STAX ECO MULTI is a versatile and efficient LED Floodlight with switchable colour temperature and dual power making it suitable for a wide range of applications.



Photometric Diagram

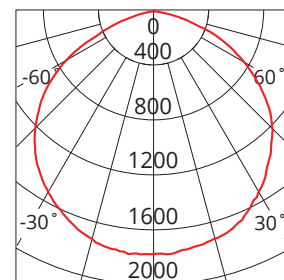

Unit: cd  
 - C0/180 112.9deg  
 - C90/270 109.9deg

#### KEY INFORMATION

Watts	50W
Input Power	50W
Lumen Output (p/metre)	5330 / 5410 / 4730lm
Install	Surface Mount
Dimming Options	Non-Dimmable
Fitting Colour	Matte Black
Warranty	3 years
IP Rating	IP66
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approval	IPART LCP 53.3

#### PHOTOMETRICS

Efficacy	107 / 108 / 95lm/W
LED	SMD
CCT	4000 / 5000 / 6000K
Beam Angle	110°

#### ELECTRICAL

Driver	Integral (DOB)
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	-
Power Factor	>0.9
LED Input Current (nominal)	-
Useful life @Ta25° (L70)	54,000hr

#### CONSTRUCTION

SDCM	<5
Housing	Die-cast Aluminum
Optics	Glass Lens
Adjustable Angle	N/A
Fixings/Hardware	Mounting bracket
Connection Type	1m Flex
Total Weight	1.2kg
Dimensions	195x233x45mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

#### ACCESSORIES



STAX-SENSOR



STAX90D-BRKT-S