



VIVA EVO

VIVA-EV-RC

SAP CODE: 2002400


Simple and effective.

VIVA EVO trade pack is Haneco's simple solution for an effective and economical residential downlight for tradespeople. With its visual attributes and performance akin to the popular VIVA, it is the ideal solution for convenient and effective lighting with exceptional value.


APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Butler Pantry, Hallways, Entrance, Staircase, Bathrooms, Ensuite, Theatre Rooms, Games Rooms, Function Areas, Hotel Rooms, Kitchen / Food Prep

DIMENSION DIAGRAMS

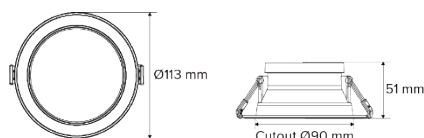

PHOTOMETRIC DIAGRAM

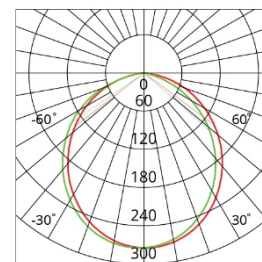

Unit: cd

— C0/180 105.5deg
— C90/270 104.0deg

KEY INFORMATION

Power	7 W
Lumen Output	750 / 800 / 750 lm
Cutout Size	Ø 90 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP44 F - IP20 B
IC Rating	IC-4
Operating Ambient Temp.	-20 to 40°C
Connection Type	600mm Flex & Plug
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	107 / 114 / 107 lm/W
CCT	3000 / 4000 / 5700 K
CRI	> 80
SDCM	< 7
UGR	> 25
Beam Angle	100°
Flicker-Free	No
Projected Lifespan	>50,000hrs@Ta40°C(L90)

ELECTRICAL

Input Voltage	220-240Vac 50/60Hz
Power Factor	> 0.85
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	Not applicable
Body Material	Polycarbonate
Diffuser Material	Polycarbonate (Opal)
Rebate Scheme Approvals	Not Applicable
Weight	0.15 kg
Dimensions	Ø113 x 51 mm