HANECO LED DOWNLIGHT INSTALLATION GUIDE

Thanks for choosing our XBOX Downlight products. We strongly recommend that you read this manual carefully before installation.

Do not cover



- Suitable for residential or commercial use in AU. Fitting cannot be covered with building insulation
- · Insulation must be placed as per clearance distances according to manufactures installation guide


WARNING

- Installation must be carried out by a licenced electrician and in accordance with these instructions and relevant Australian standards and local regulations.
- Ensure input voltage conforms within product specifications.
- Ensure wires are securely connected.
- Before switching on, ensure all wires are correctly connected.
- The warranty is void if product is not installed according to the instructions.


Product Specifications

Product Code	Cutout	Adjustable Angle	Dimming Method	IC Rating	IP Rating	Operating Temp
XBOX15W-TRI	162 x 162 mm	0-30°	Phase-Cut Dimmable	DO NOT COVER	IP40 (From Below)	-20-45°C
XBOX30W-TRI	300 x 162 mm	0-30°	Phase-Cut Dimmable	DO NOT COVER	IP40 (From Below)	-20-45°C


Installation Instructions




Switch off power.




Cut an appropriately sized hole in the ceiling, matching the specified cutout dimensions for your model.




Insert driver and cables through the cut-out into the ceiling cavity and plug into a pre-wired socket outlet inside the ceiling.




Connect the luminaire to the driver.

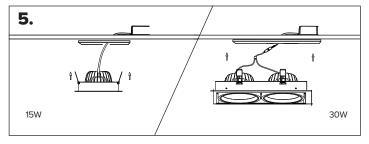

Fold mounting clips up to the sides of the luminaire and insert luminaire through the cut-out.



Ensure insulation do not abut and cover the luminaire*.



Switch on power.

